




Tubing Connector 에서 계속...

T- Type Connector, T-형 연결관, PP ⑤

Cat. No.	Model	Connector od (외경)	EA Price ₩
C20-140-148	PPT01	1/16" / 1.59 mm	3,700
C20-140-152	PPT02	3/32" / 2.38 mm	3,700
C20-140-156	PPT03	1/8" / 3.18 mm	3,700
C20-140-160	PPT04	5/32" / 3.97 mm	5,000
C20-140-164	PPT05	3/16" / 4.76 mm	5,700
C20-140-168	PPT06	1/4" / 6.35 mm	3,200
C20-140-172	PPT08	5/16" / 7.94 mm	3,200
C20-140-176	PPT09	3/8" / 9.53 mm	3,200
C20-140-180	PPT12	1/2" / 12.7 mm	3,400
C20-140-184	PPT16	5/8" / 15.9 mm	3,700
C20-140-188	PPT19	3/4" / 19.05 mm	3,800
C20-140-192	PPT25	1" / 25.4 mm	4,600

PVDF 테프론

Cat. No.	Model	EA Price ₩
C20-140-440	PVT01	4,000
C20-140-444	PVT02	4,300
C20-140-448	PVT03	4,500
C20-140-452	PVT04	6,200
C20-140-456	PVT05	7,300
C20-140-460	PVT06	7,500
C20-140-464	PVT08	7,500
C20-140-468	PVT09	7,500
C20-140-472	PVT12	8,400
C20-140-476	PVT16	10,900
C20-140-480	PVT19	13,700
C20-140-484	PVT25	17,500

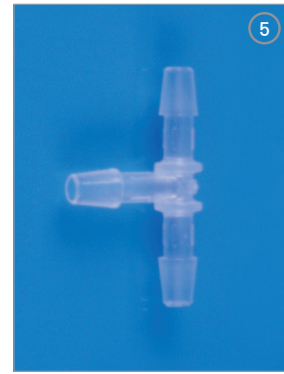

Reduction Straight Connector, 일자형 축소 연결관, PP ⑥

Cat. No.	Model	Connector od (외경)	EA Price ₩
C20-140-196	PPSR01	3.18 ~ 1.59 mm	1,500
C20-140-200	PPSR03	6.35 ~ 3.18 mm	2,900
C20-140-204	PPSR05	7.94 ~ 6.35 mm	2,900
C20-140-208	PPSR06	9.53 ~ 6.35 mm	2,900
C20-140-212	PPSR07	12.7 ~ 6.35 mm	2,900
C20-140-216	PPSR08	12.7 ~ 7.94 mm	2,900
C20-140-220	PPSR09	19.05 ~ 9.53 mm	2,900
C20-140-224	PPSR12	19.05 ~ 12.7 mm	2,900
C20-140-228	PPSR13	25.4 ~ 12.7 mm	3,900


PVDF 테프론

Cat. No.	Model	EA Price ₩
C20-140-488	PVSR01	2,300
C20-140-492	PVSR03	4,100
C20-140-496	PVSR05	5,700
C20-140-500	PVSR06	5,800
C20-140-504	PVSR07	7,200
C20-140-508	PVSR08	7,200
C20-140-512	PVSR09	9,300
C20-140-516	PVSR12	9,800
C20-140-520	PVSR13	12,300



Y-Shape Connector, 120° 120도 Y형 연결관


- 재질 : PP, 0 ~ 135 °C 내열
- Gray 색상의 내화학 재질
- Brand GmbH



Cat. No.	Model	사용 Tubing id	EA Price ₩
C20-59-311	153005	4 ~ 5 mm	3,300
C20-59-315	153010	6 ~ 7 mm	3,600
C20-59-319	153015	8 ~ 9 mm	4,100
C20-59-323	153020	10 ~ 11 mm	4,200
C20-59-327	153025	12 ~ 13 mm	5,100
C20-59-331	153030	13 ~ 15 mm	5,800

X-Shape Connector X형 연결관

- 재질 : PP, 0 ~ 135 °C 내열
- 반투명 내화학 재질
- Brand GmbH



Cat. No.	Model	사용 Tubing id	EA Price ₩
C20-59-210	153105	2 ~ 3 mm	3,400
C20-59-214	153110	5 mm	3,500
C20-59-218	153115	6 ~ 7 mm	3,700
C20-59-222	153120	9 mm	4,300
C20-59-226	153125	10 ~ 11 mm	4,600
C20-59-230	153130	12 ~ 13 mm	4,600
C20-59-234	153135	14 ~ 15 mm	5,200

Check Valve 역류 방지 밸브

- Non-return Valve
- Brand GmbH



Cat. No.	Model	Connector O.D.	재질	EA Price ₩
C20-20-337	134002	ø6 ~ ø10 mm	HDPE	6,000

Quick Pressure Coupling 분리형 연결관

- 재질 : POM, -40 ~ 150 °C 내열
- 3 Parts
 - ① 튜빙 Connector 2개
 - ② 분리형 중간 Connector 1개
 - ③ O-ring 2개
- LK Labkorea



Cat. No.	Model	사용 Tubing id	EA Price ₩
C20-53-244	KK45	4 ~ 5 mm	14,600
C20-53-250	KK90	8 ~ 9 mm	14,600